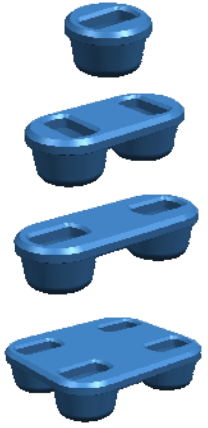





Fixed fitting

Type		Name	Center to center [mm]	Weight [kg]	Type	Name	Center to center [mm]	Weight [kg]
	FS-1A/28			7.7		FS-1A/16		6
		203	18.5	203			16.2	
		216	19	216			16.5	
	FS-1B/28	258	20.7	FS-1B/16	258	17.5		
		279	21.5		279	18		
	FS-1C/28	203	48.6	FS-1C/16	203	36.4		
		216	49.9		216	37.2		
		258	54.2		258	39.6		
	Nom. breaking load[kN]	Tension	500					
		Shear	420					
	Material		Steel plate					
	Counter parts		Manual twistlock; stacking cone					
Treatment		Shotblasted and primered; other treatment on request						
Remarks		On request: different distance,different shape of top-plate,different thickness of pot, different chamfer at top-plate .When ordering pockets,please state chamfer a x α						
Type	Name	Weight [kg]	Material	Counter parts	Treatment	Nom. breaking load[kN]	On request	
Support foundation		CS-S-1	17.6	Steel plate	Tension pressure element:CS-1	Shotblasted and primered; other treatment on request	Tension: 1000	different distance,different chamfer at top-plate,different heights
		CS-S-2	42.5					